



SNS COLLEGE OF TECHNOLOGY

(AN AUTONOMOUS INSTITUTION)

Approved by AICTE & Affiliated to Anna University
Accredited by NBA & Accredited by NAAC with 'A++' Grade,
Recognized by UGC saravanampatti (post), Coimbatore-641035.



Department of Biomedical Engineering

Course Name: Control Systems

III Year : V Semester

Unit I –PHYSIOLOGICAL MODELING

Topic : Mathematical modelling of systems



Introduction

- The control systems can be represented with a set of mathematical equations known as mathematical model. These models are useful for analysis and design of control systems.
- The following mathematical models are mostly used.
 - ✓ Differential equation model
 - ✓ Transfer function model
 - ✓ State space model



Mathematical Model




- A mathematical model is a set of equations (usually differential equations) that represents the dynamics of systems.
- In practice, the complexity of the system requires some assumptions in the determination model.
- How do we obtain the equations?
 - Physical law of the process
 - Examples:
 - ✓ Mechanical system (Newton's laws)
 - ✓ Electrical system (Kirchhoff's laws)



Transfer Function



- Transfer function model is an s-domain mathematical model of control systems.
- The Transfer function of a Linear Time Invariant (LTI) system is defined as the ratio of Laplace transform of output and Laplace transform of input by assuming all the initial conditions are zero.

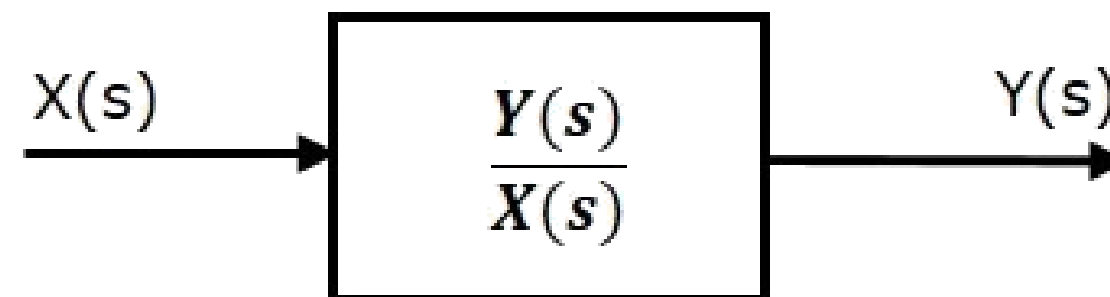



Mechanical System


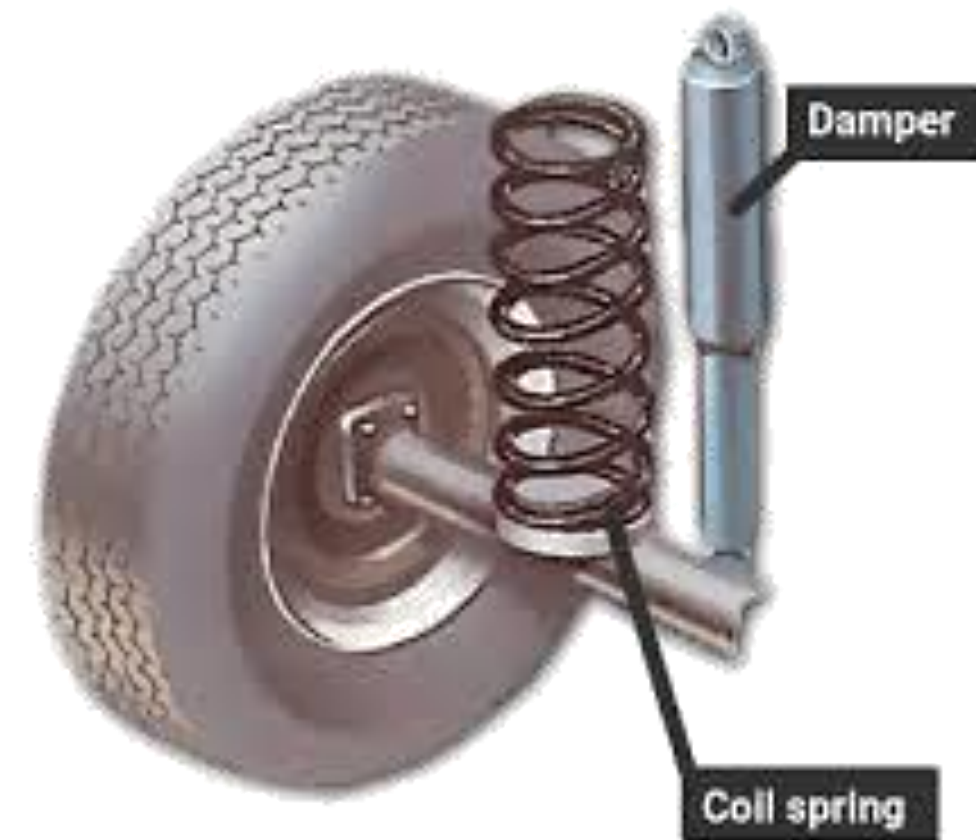


Figure 1: Scheme of an active vehicle suspension system



Mechanical System

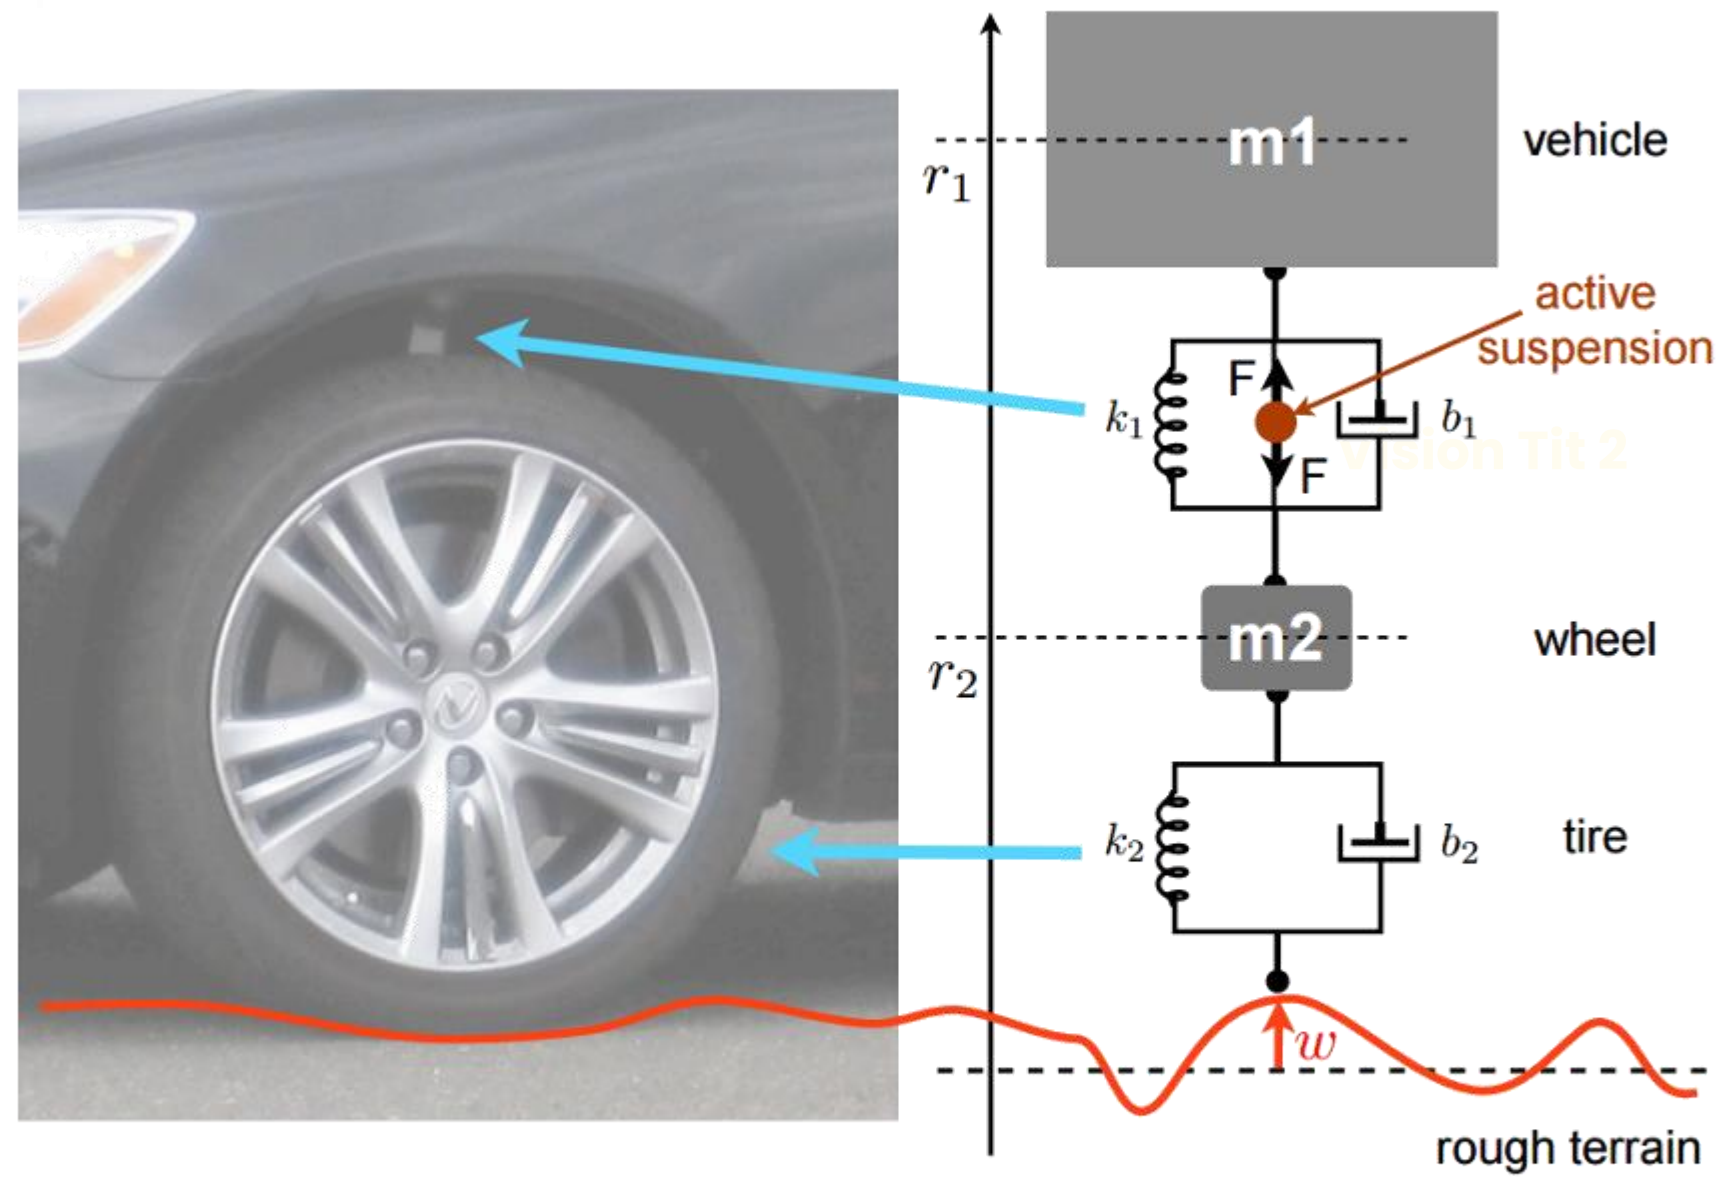


- Mechanical systems mainly consists of three main elements namely mass, dashpot and spring.
- If a force is applied to a translational mechanical system, then it is opposed by opposing forces due to mass, elasticity and friction of the system.
- Since the applied force and the opposing forces are in opposite directions, the algebraic sum of the forces acting on the system is zero.



Mechanical System

- Mass:

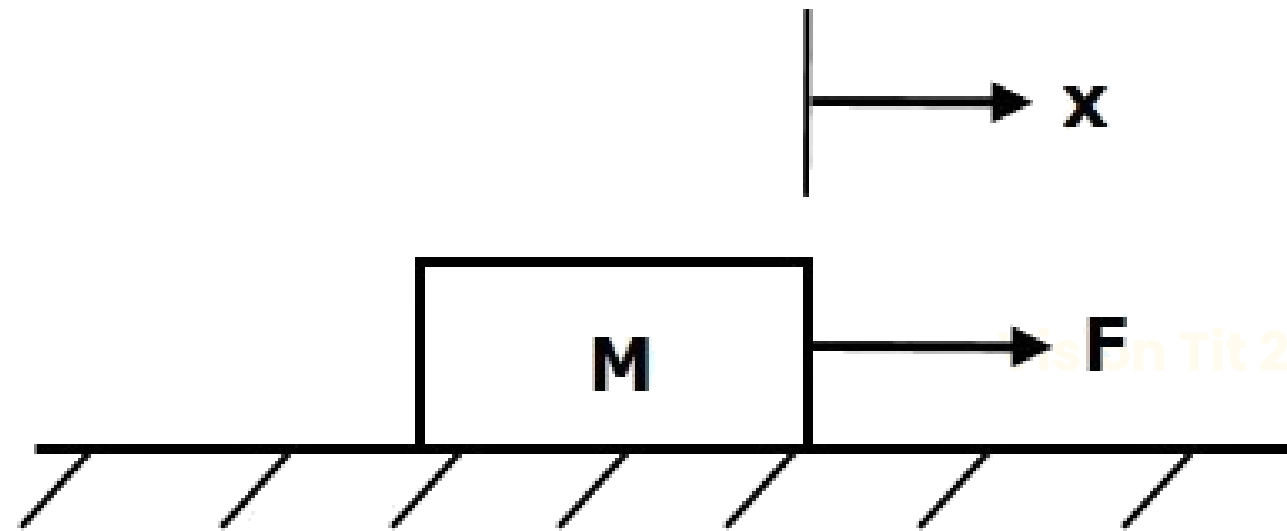

$$F_m \propto a$$

$$F_m = M_a = M \frac{d^2x}{dt^2}$$

$$F = F_m = M \frac{d^2x}{dt^2}$$


Where,

- F is the applied force
- F_m is the opposing force due to mass
- M is mass
- a is acceleration
- x is displacement



Mechanical System

- Spring:

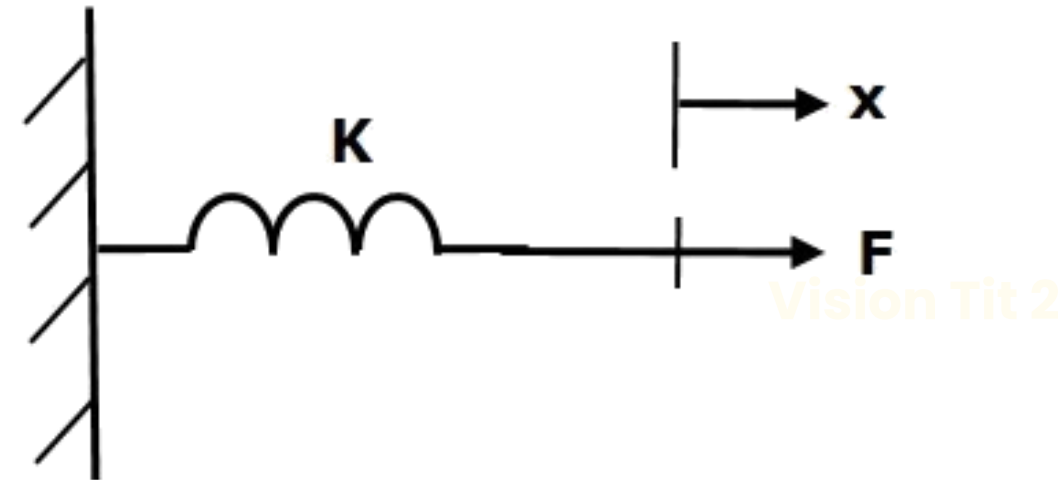

$$F \propto x$$

$$F_k = Kx$$

$$F = F_k = Kx$$


Where,

- F is the applied force
- F_k is the opposing force due to elasticity of spring
- K is spring constant
- x is displacement



Mechanical System

- Dashpot:

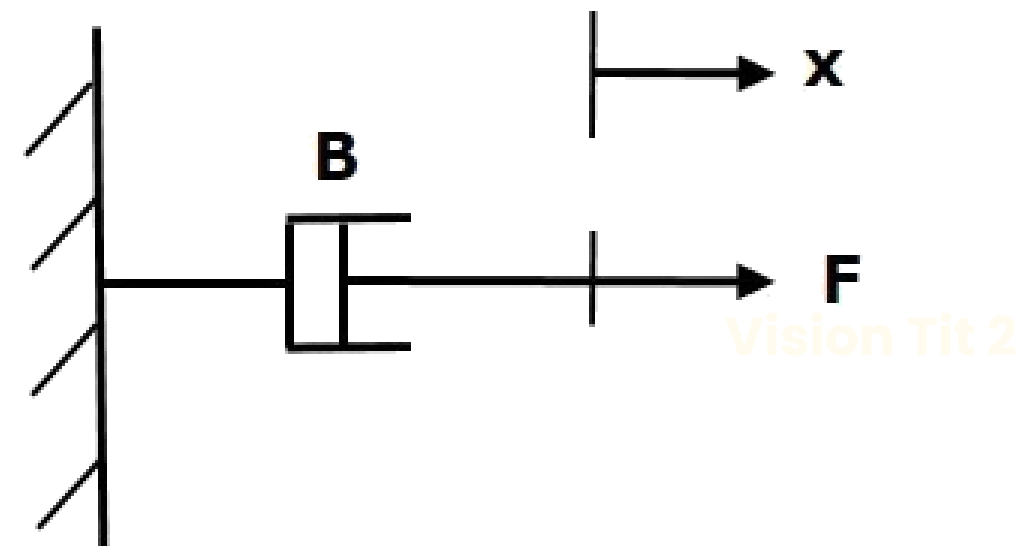

Where,

- F is the applied force
- F_k is the opposing force due to friction of dashpot
- B is spring constant frictional coefficient
- v is velocity
- x is displacement

$$F_b \propto v$$


$$F_b = Bv = B \frac{dx}{dt}$$

$$F = F_b = B \frac{dx}{dt}$$




Mechanical System

- ✓ Transfer function of the mechanical translational system given in figure.

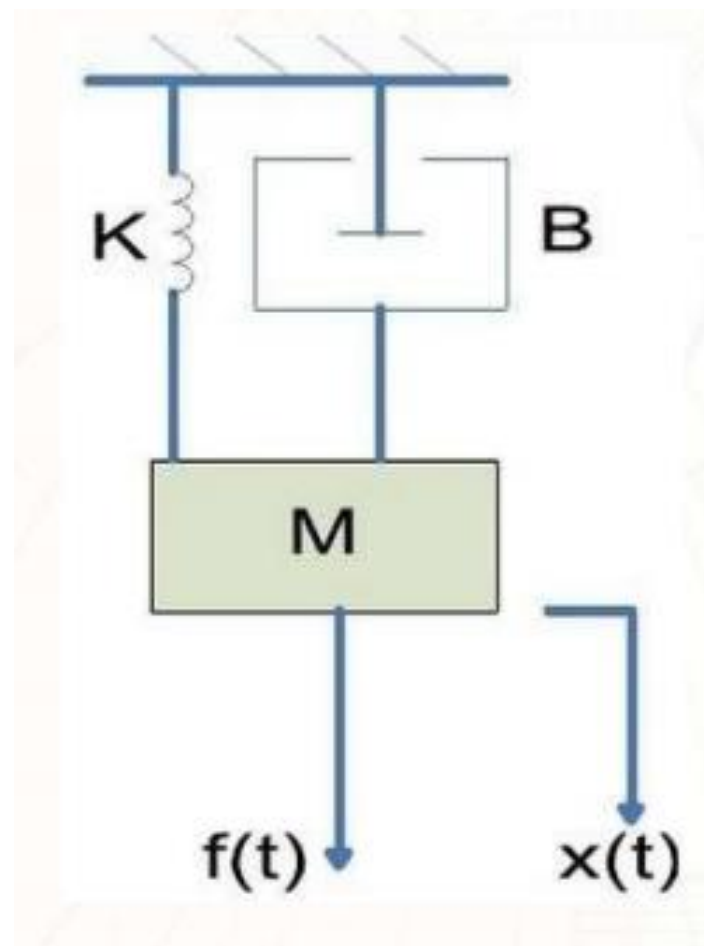

Vision Tit 2

$$f(t) = f_k + f_M + f_B$$

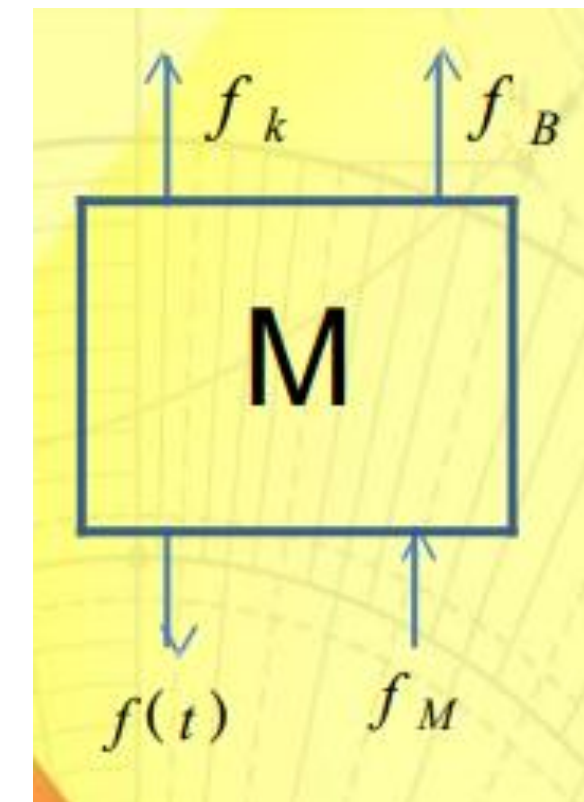


$$\frac{X(s)}{F(s)} = \frac{1}{Ms^2 + Bs + k}$$



Electrical System

Resistance

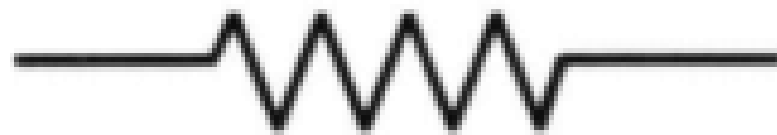

V-I in time domain

$$v_R(t) = i_R(t)R$$

V-I in s domain

$$V_R(s) = I_R(s)R$$

Inductance




V-I in time domain

$$v_L(t) = L \frac{di_L(t)}{dt}$$

V-I in s domain

$$V_L(s) = sLI_L(s)$$

Capacitance



V-I in time domain

$$v_C(t) = \frac{1}{C} \int i_C(t) dt$$


V-I in s domain

$$V_C(s) = \frac{1}{Cs} I_C(s)$$



Electrical System

Transfer function $G(s) = E_o(s) / E_i(s)$ of the RLC network

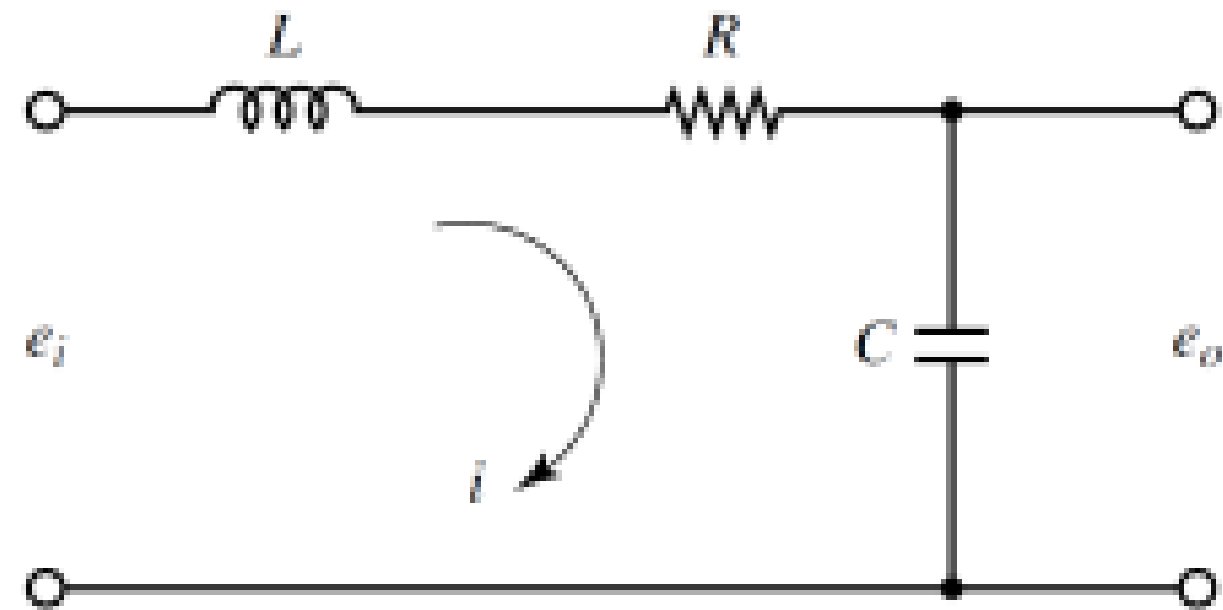

RLC circuit

Applying the Kirchhoff's voltage law:

$$\sum V = 0$$

$$e_i(t) - L \frac{di}{dt} - R \cdot i - \frac{1}{C} \int i dt = 0$$

$$\frac{1}{C} \int i dt = e_o$$



Vision Tit 2

Thank You