



SNS COLLEGE OF TECHNOLOGY

(AN AUTONOMOUS INSTITUTION)

Approved by AICTE & Affiliated to Anna University
Accredited by NBA & Accredited by NAAC with 'A++' Grade,
Recognized by UGC saravanampatti (post), Coimbatore-641035.



Department of Biomedical Engineering

Course Name: Control Systems


III Year : V Semester

Unit III – Frequency Response Analysis

Topic : Frequency Domain Specifications




Frequency Domain Specifications

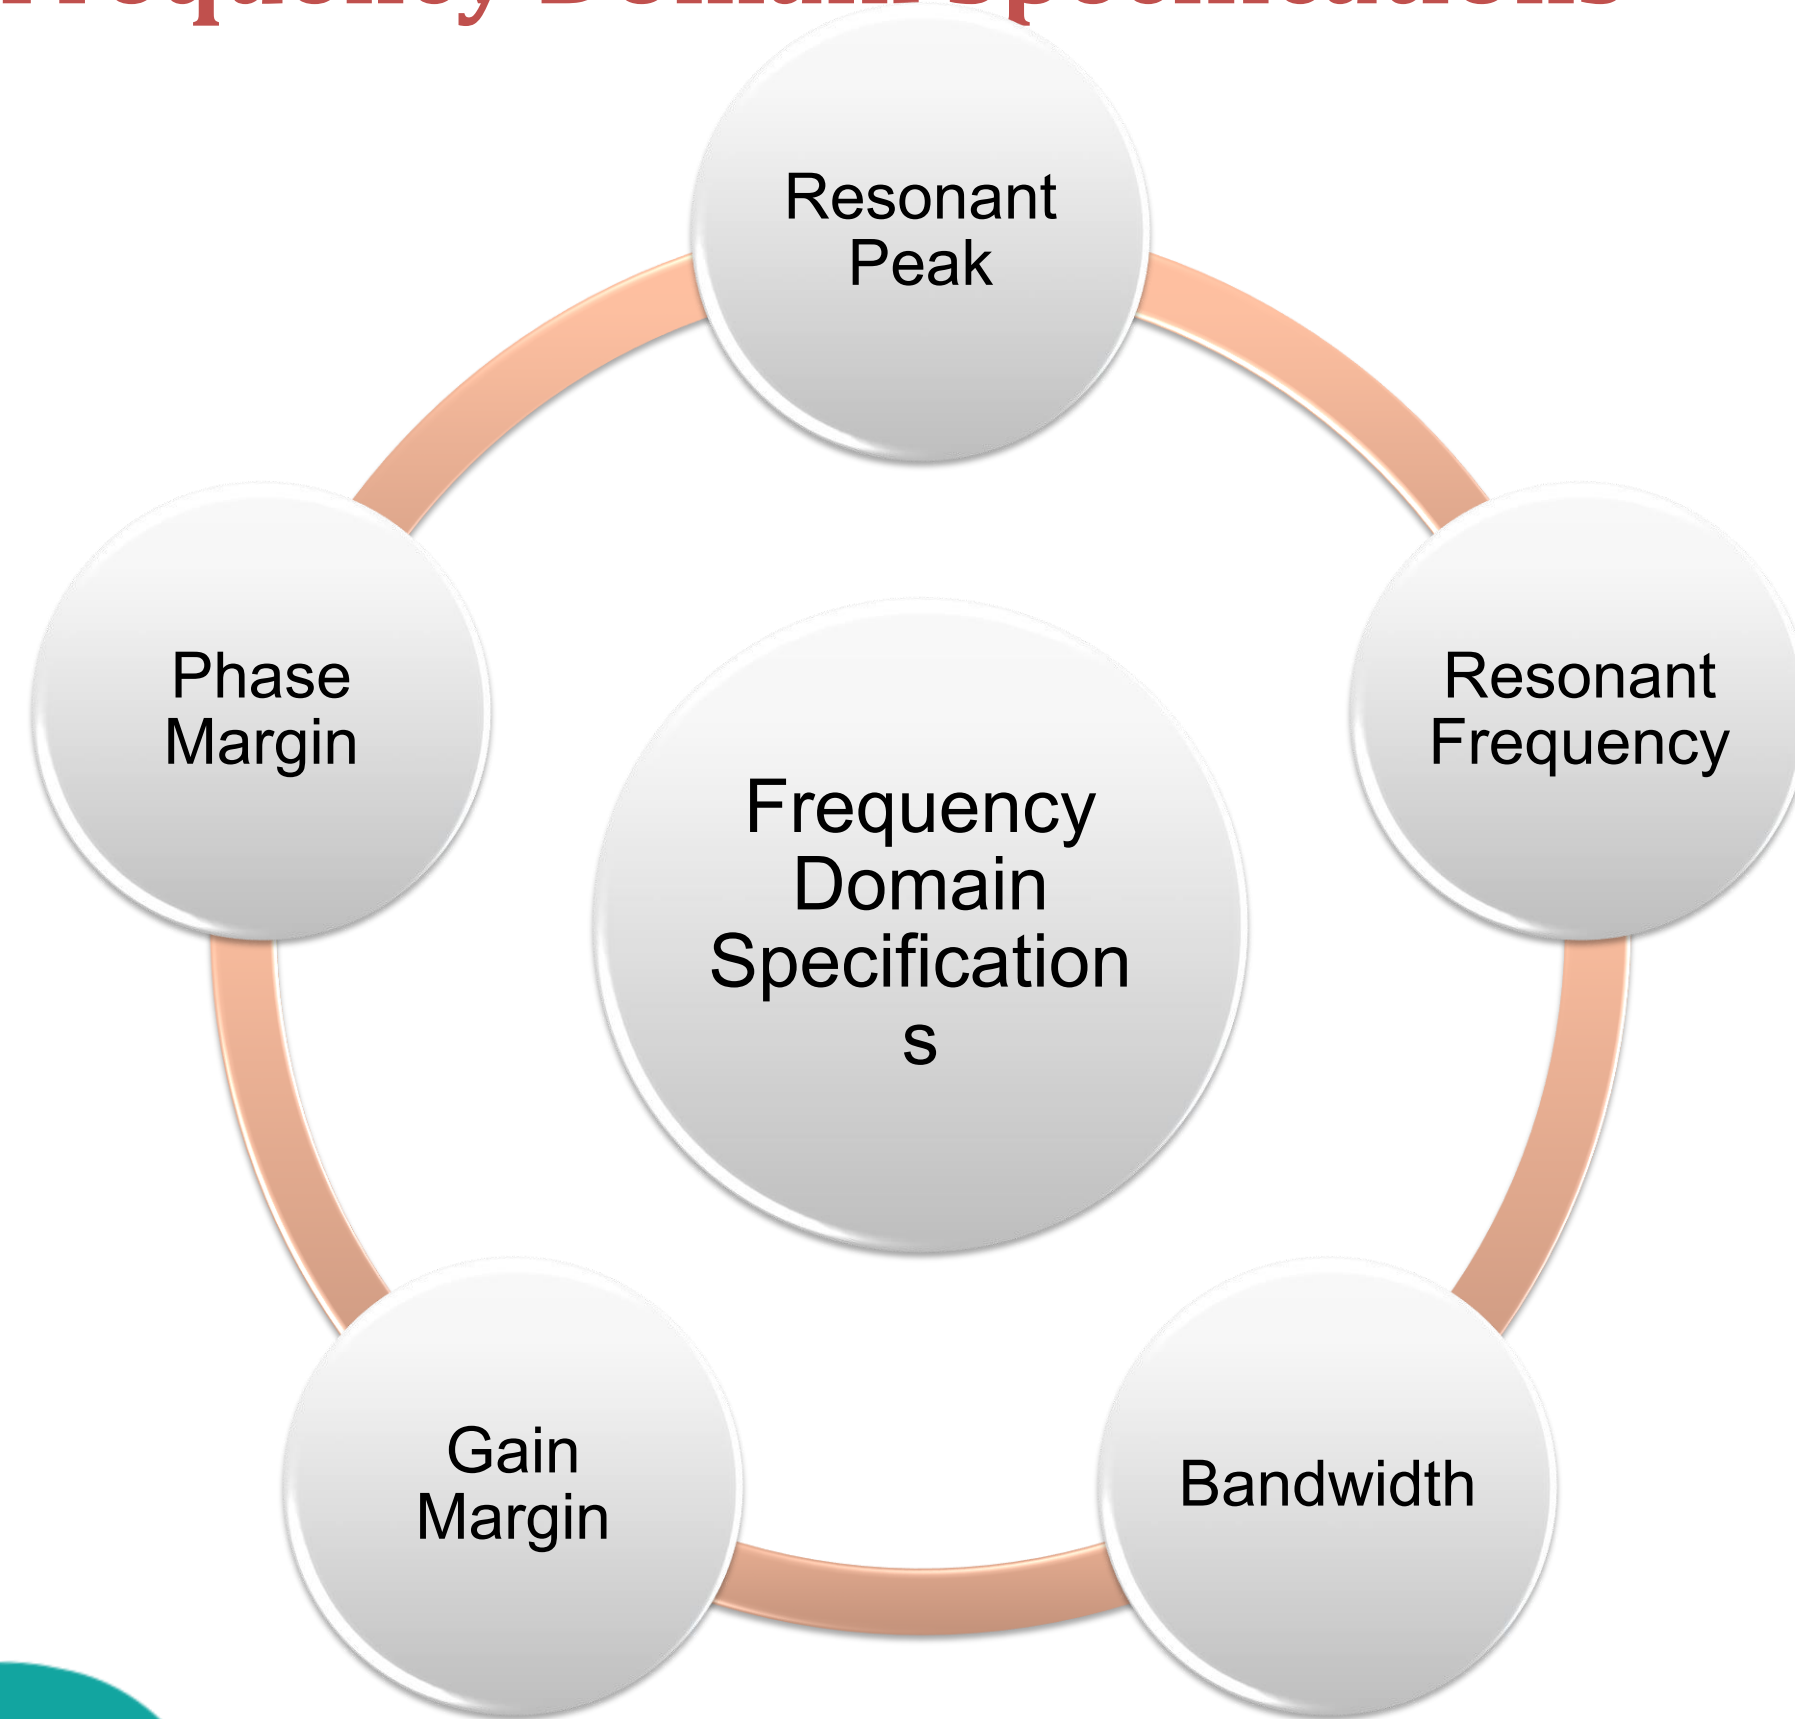



Frequency Domain Specifications

- The steady state response of a system to a purely sinusoidal input is defined as the frequency response of a system.

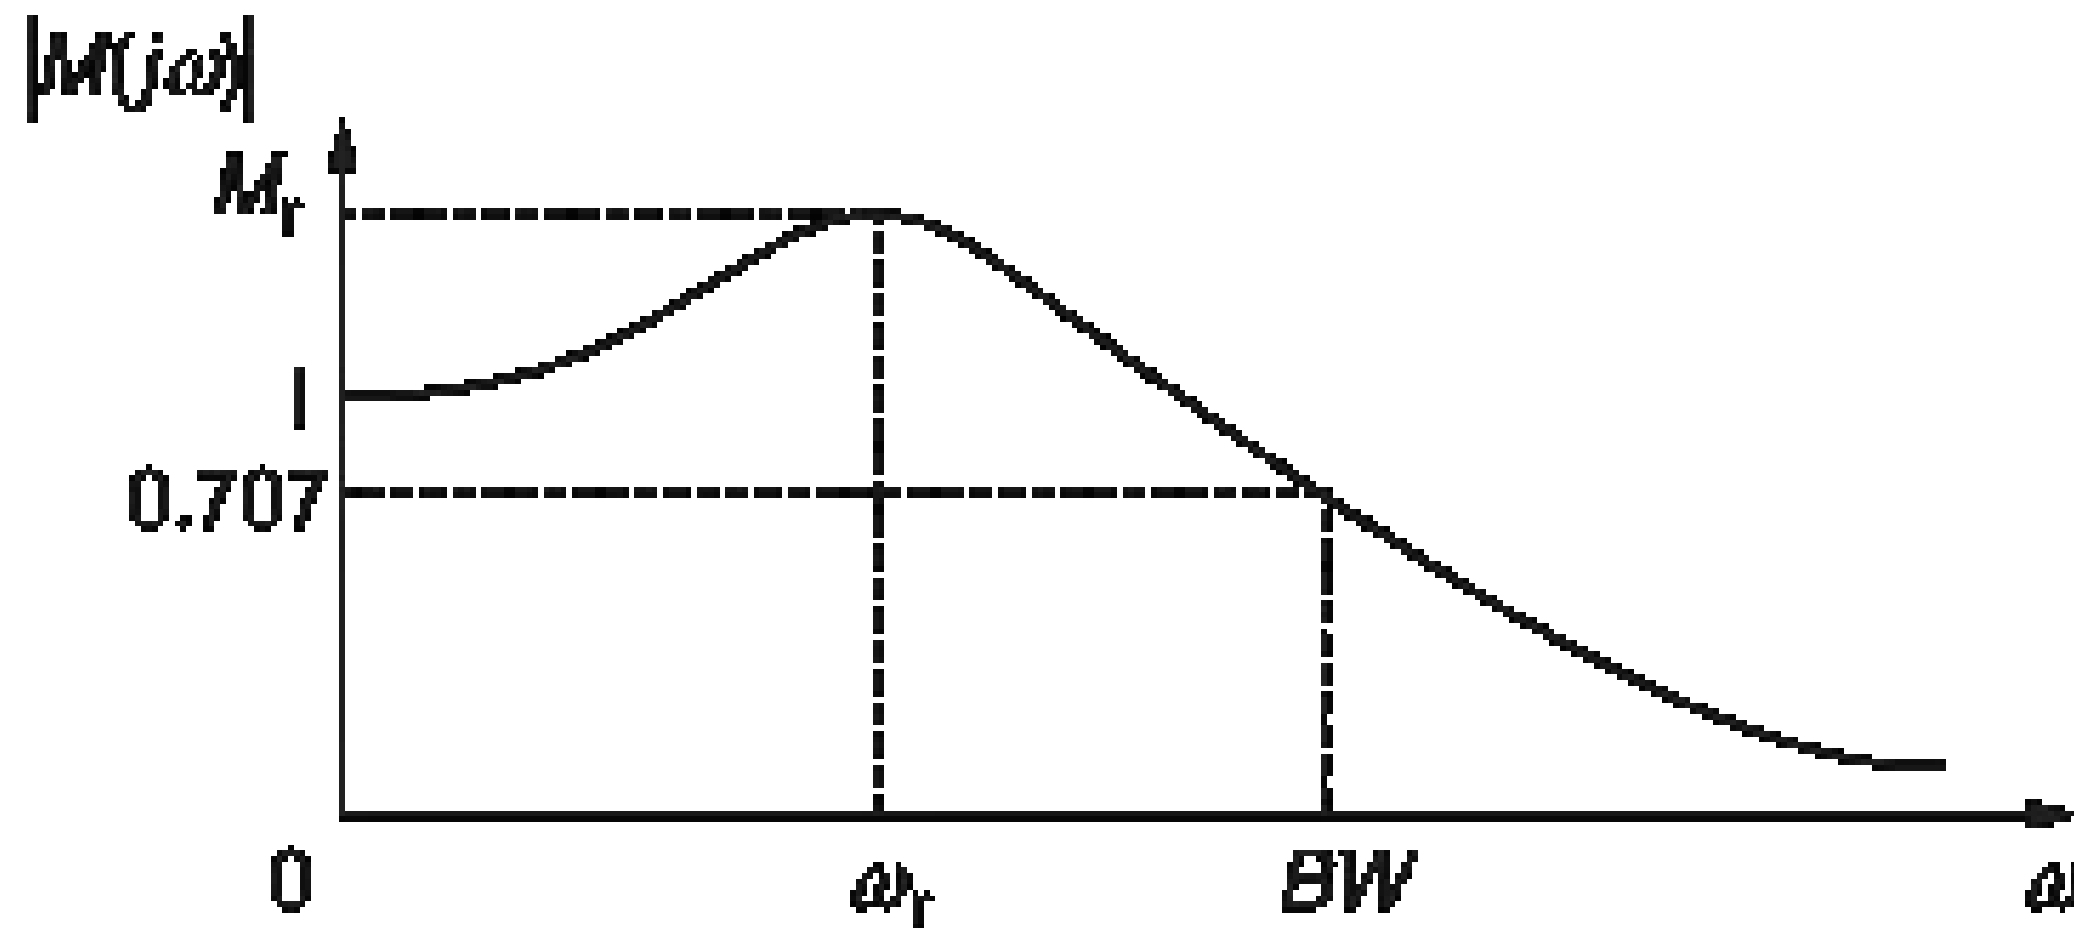



Frequency Domain Specifications



- Consider the transfer function of the second order closed loop control system as

$$T(s) = \frac{C(s)}{R(s)} = \frac{\omega_n^2}{s^2 + 2\delta\omega_n s + \omega_n^2}$$

- Substitute, $s=j\omega$ in the above equation.

$$T(j\omega) = \frac{\omega_n^2}{(j\omega)^2 + 2\delta\omega_n(j\omega) + \omega_n^2}$$

- Magnitude of $T(j\omega)$ is

$$M = |T(j\omega)| = \frac{1}{\sqrt{(1-u^2)^2 + (2\delta u)^2}}$$

- Phase of $T(j\omega)$ is

$$\angle T(j\omega) = -\tan^{-1} \left(\frac{2\delta u}{1-u^2} \right)$$



Resonant Frequency




- It is the frequency at which the magnitude of the frequency response has peak value for the first time. It is denoted by ω_r . At $\omega = \omega_r$, the first derivative of the magnitude of $T(j\omega)$ is zero.

$$\frac{dM}{du} = -\frac{1}{2} \left[(1 - u^2)^2 + (2\delta u)^2 \right]^{-\frac{3}{2}} [2(1 - u^2)(-2u) + 2(2\delta u)(2\delta)]$$

Substitute, $u = u_r$ and $\frac{dM}{du} = 0$ in the above equation.

$$u_r = \sqrt{1 - 2\delta^2}$$

$$\omega_r = \omega_n \sqrt{1 - 2\delta^2}$$

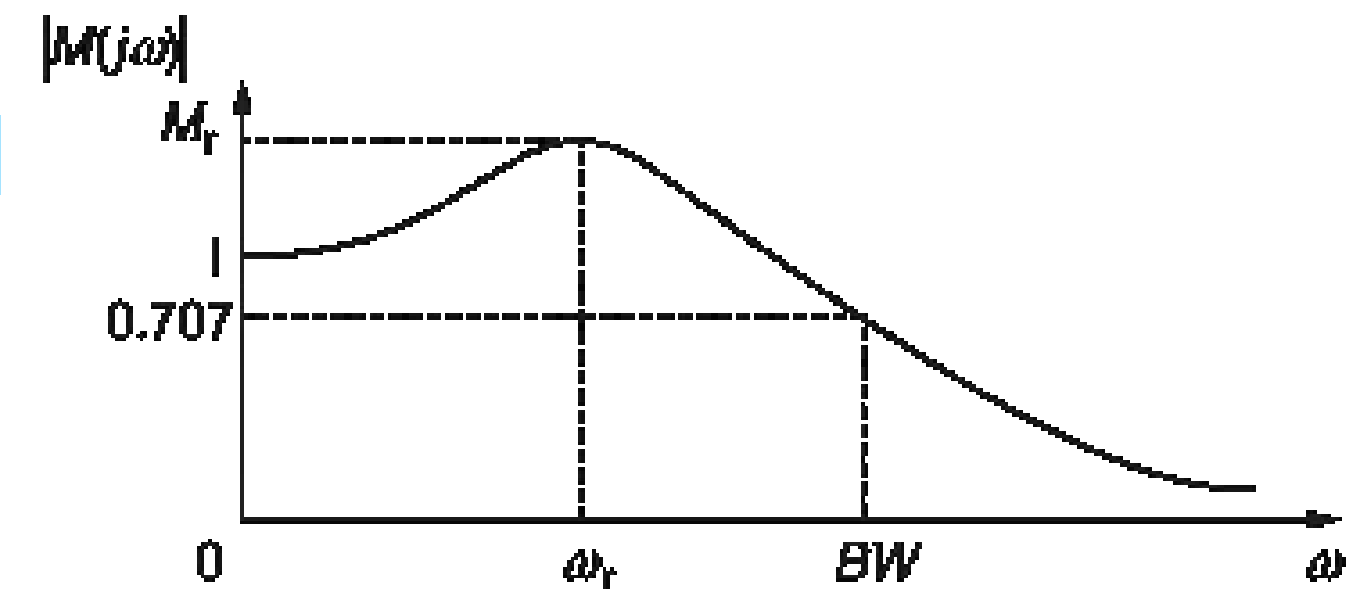



Resonant Peak


- It is the peak (maximum) value of the magnitude of $T(j\omega)$. It is denoted by M_r .
- At $u=u_r$, the Magnitude of $T(j\omega)$ is –

$$M_r = \frac{1}{\sqrt{(1 - u_r^2)^2 + (2\delta u_r)^2}}$$

Substitute, $u_r = \sqrt{1 - 2\delta^2}$ and $1 - u_r^2 = 2\delta^2$ in the above equation.

$$M_r = \frac{1}{\sqrt{(2\delta^2)^2 + (2\delta\sqrt{1 - 2\delta^2})^2}}$$

$$\Rightarrow M_r = \frac{1}{2\delta\sqrt{1 - \delta^2}}$$

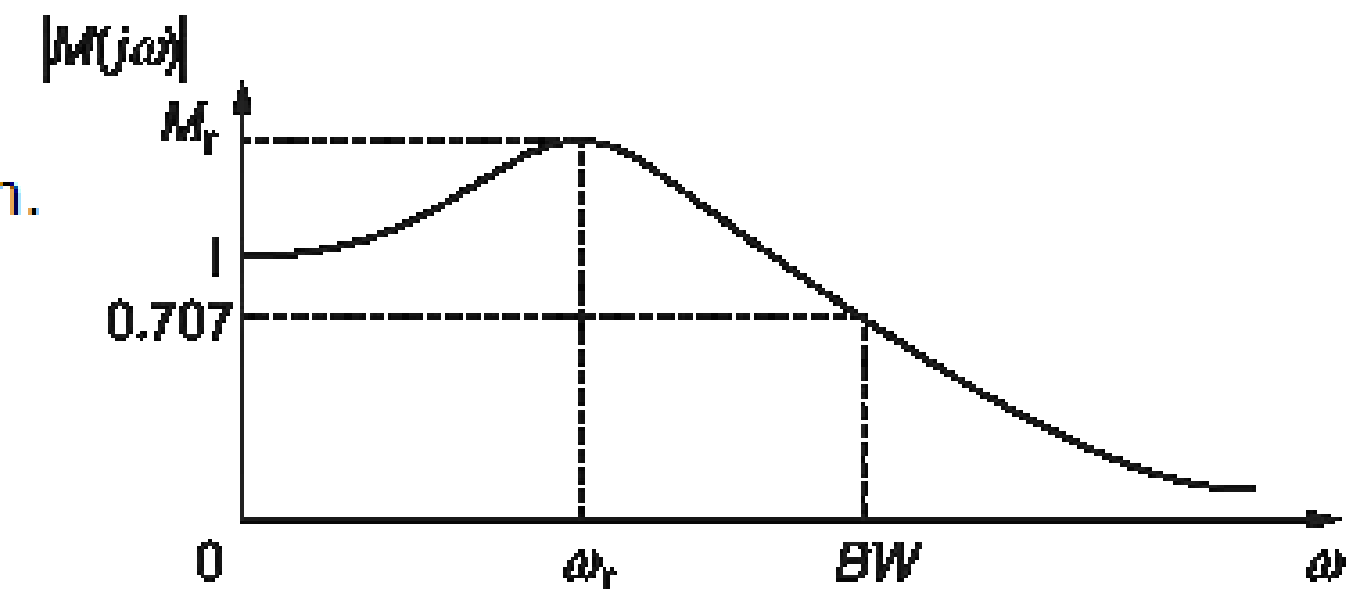




Bandwidth

- It is the range of frequencies over which, the magnitude of $T(j\omega)$ drops to 70.7% from its zero frequency value.
- At 3-dB frequency, the magnitude of $T(j\omega)$ will be 70.7% of magnitude of $T(j\omega)$ at $\omega=0$.
- i.e., at $\omega=\omega_b$ $M=0.707(1)=1/\sqrt{2}$

$$\Rightarrow M = \frac{1}{\sqrt{2}} = \frac{1}{\sqrt{(1 - u_b^2)^2 + (2\delta u_b)^2}}$$

$$\Rightarrow \omega_b = \omega_n \sqrt{1 - 2\delta^2 + \sqrt{(2 - 4\delta^2 + 4\delta^4)}}$$

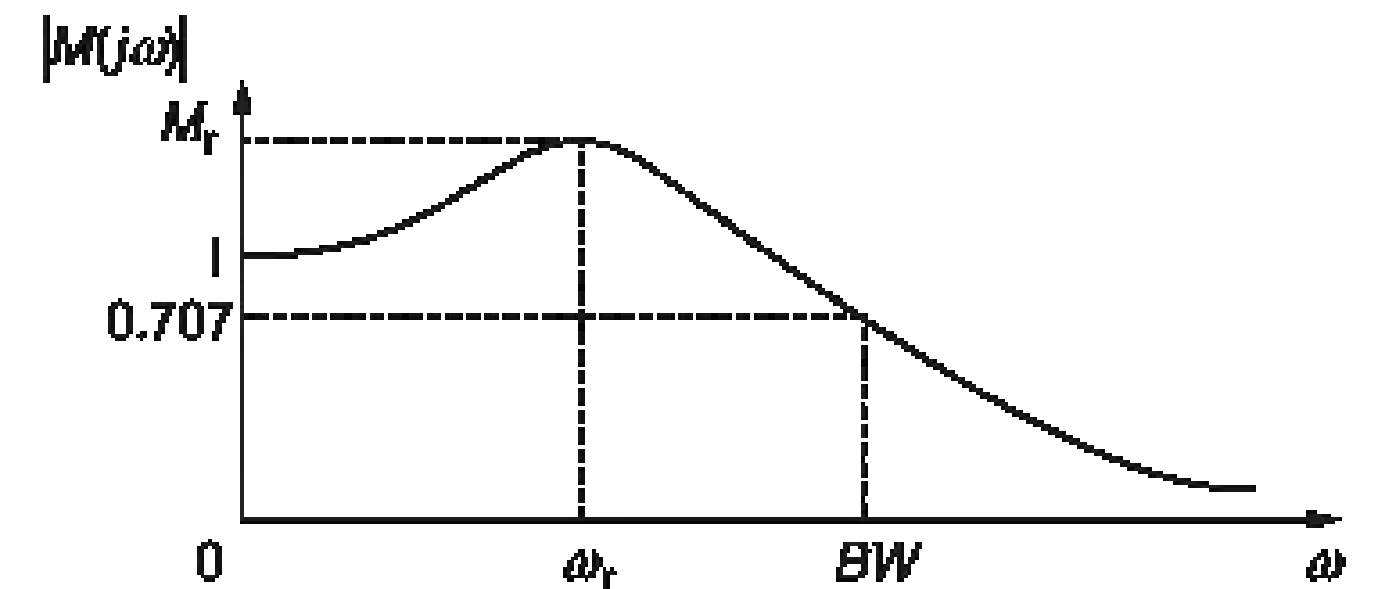



Thank You

8