



SNS COLLEGE OF TECHNOLOGY



Coimbatore-35.

An Autonomous Institution

Accredited by NBA – AICTE and Accredited by NAAC – UGC with ‘A++’ Grade
Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

**COURSE NAME : 23ITT202 – COMPUTER ORGANIZATION AND
ARCHITECTURE**

II YEAR/ III SEMESTER

UNIT – II Arithmetic Operations

Topic: Addition & Subtraction of signed numbers

Ms. Jacquelin Anushya.P

Assistant Professor

Department of Computer Science and Engineering



Representation of Signed Numbers

- In computer, everything are binary numbers,
 - 0 represents positive number
 - 1 represents Negative numbers

- Left most bit represent the sign bit

Example

01001 +9

11001 -9




1's & 2's Complement

- To get the 1's complement of a binary number, simply invert the given number. (all 1 to 0 and 0 to 1)
- To get 2's complement of a binary number, simply invert the given number and add 1 to the least significant bit(LSB).



Addition & Subtraction of Signed numbers

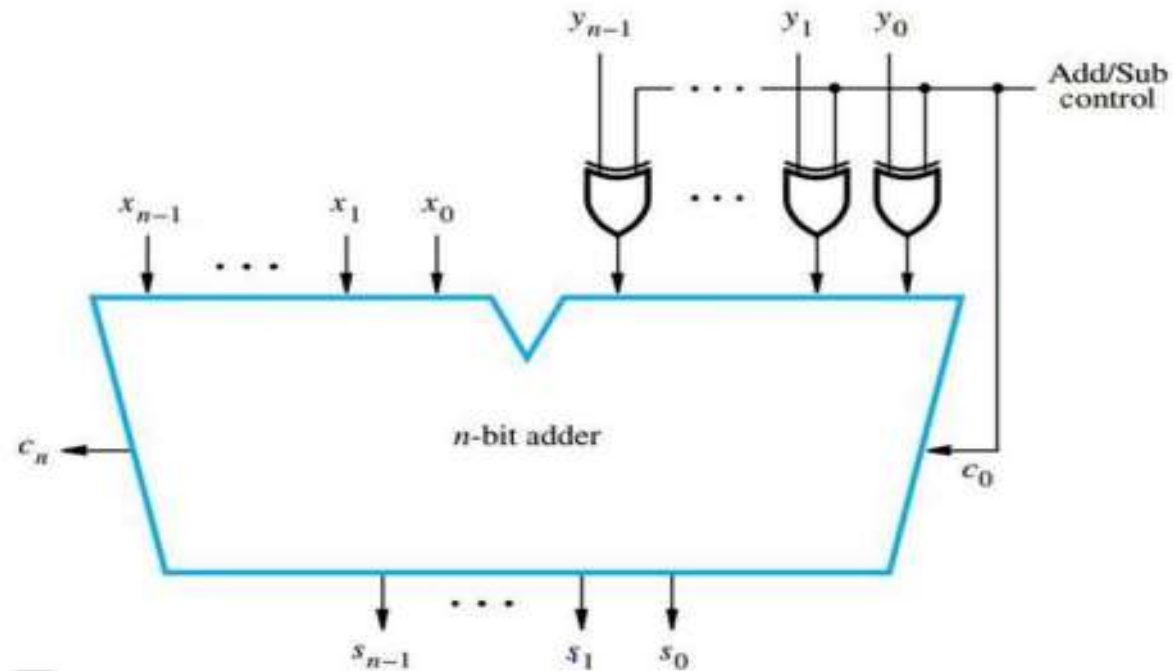

- Addition \rightarrow Add/sub control = 0.
- Subtraction \rightarrow Add/sub control = 1

Binary Addition/Subtraction Logic Network


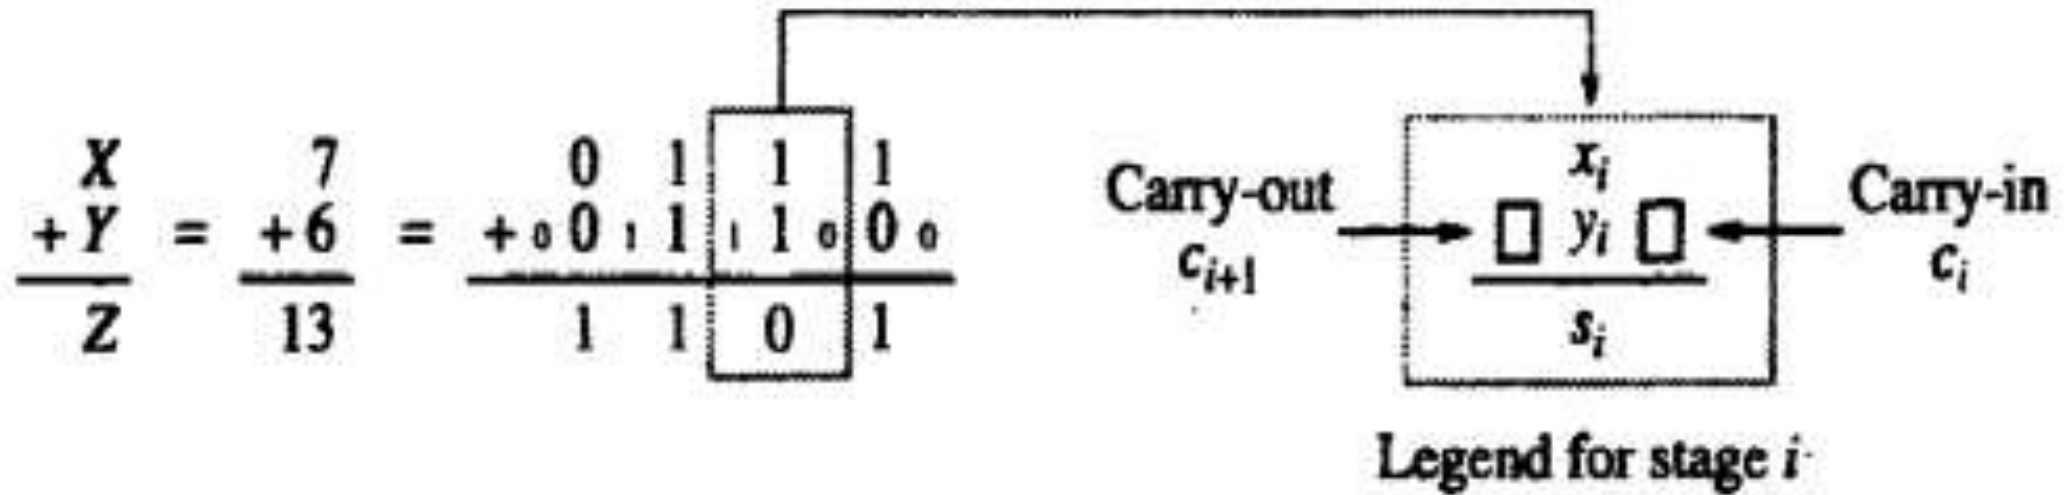


Figure 6.1 Logic specification for a stage of binary addition.




Full adder

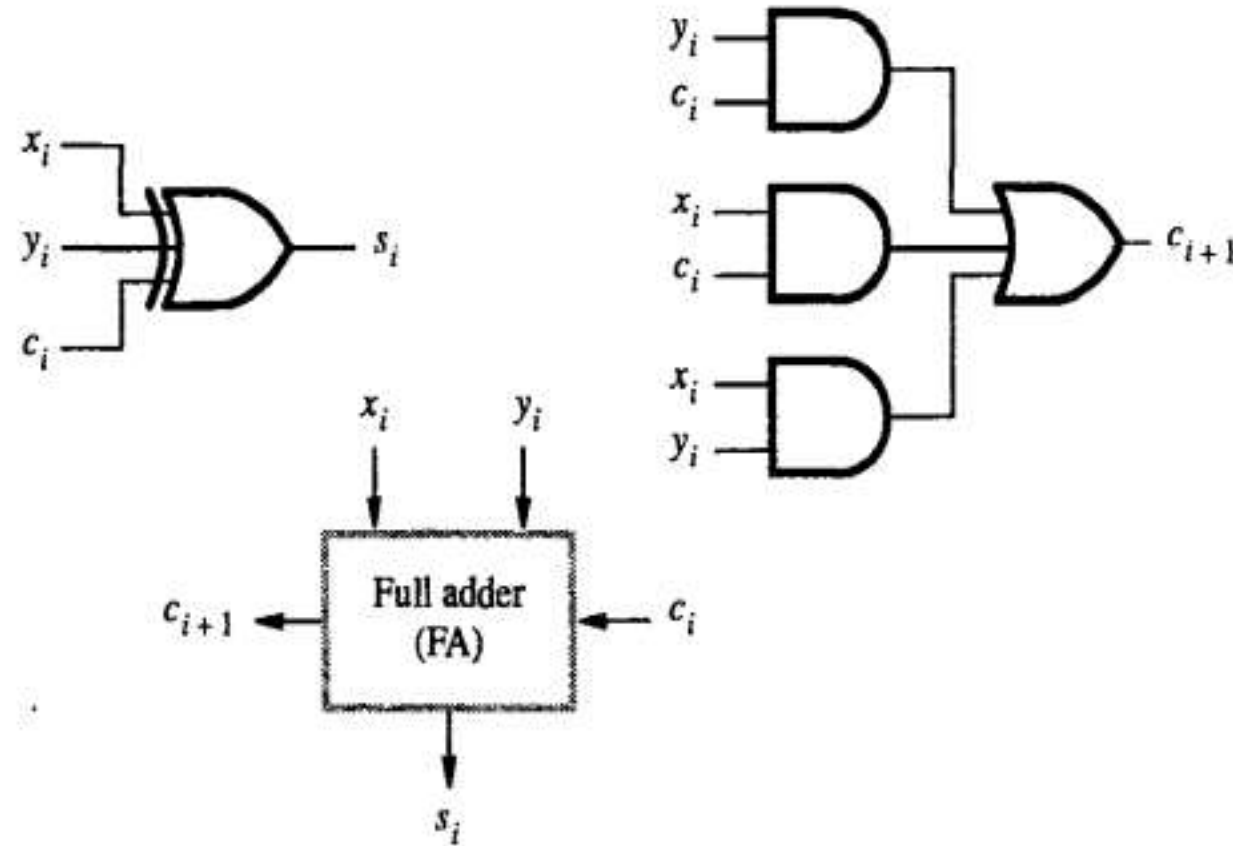

(a) Logic for a single stage




n-bit ripple-carry adder

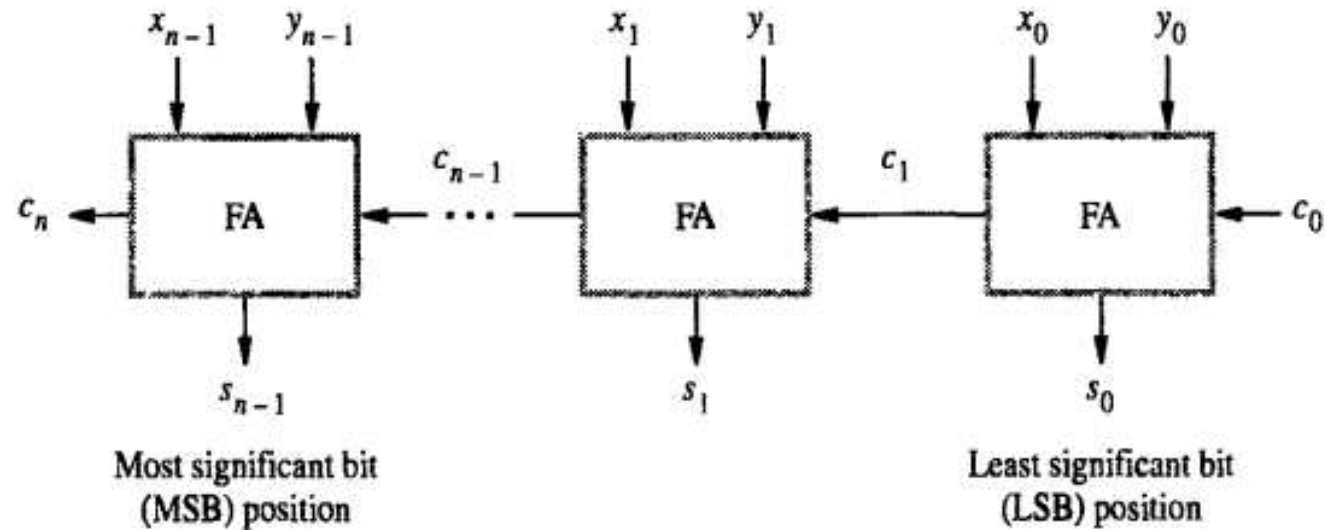

(b) An n -bit ripple-carry adder

A cascaded connection of n full adder blocks, as shown in Figure 6.2b, can be used to add two n -bit numbers. Since the carries must propagate, or ripple, through this cascade, the configuration is called an n -bit ripple-carry adder.

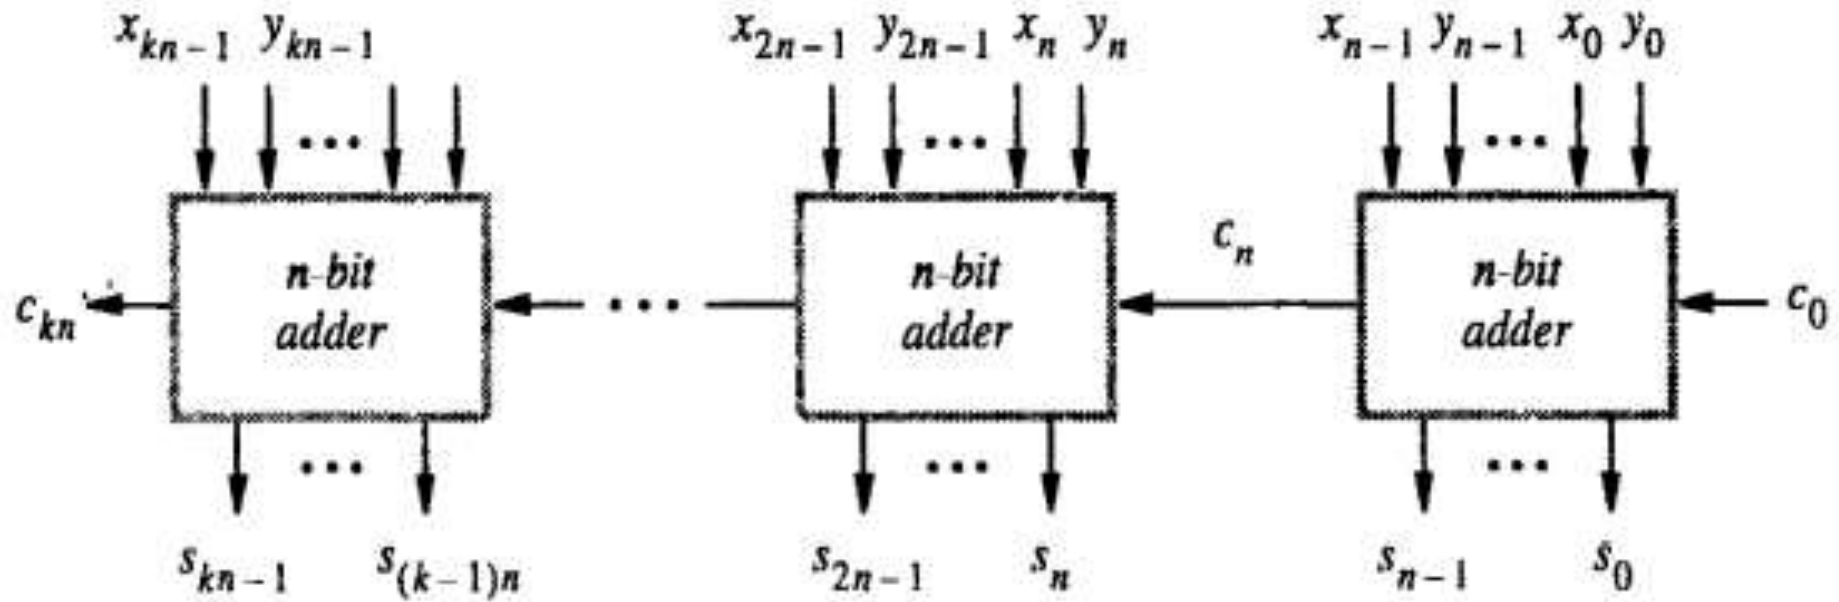

(c) Cascade of k n -bit adders

Figure 6.2 Logic for addition of binary vectors.



Addition Algorithm

- Adding two numbers with same sign, add the values & keep the same sign for result.
- Adding two numbers with different sign, subtract the two values & keep the sign of larger value to the result.

Subtraction Algorithm

- To subtract the +ve or -ve numbers just change the sign of the number being subtracted and then perform addition algorithm.



Addition (**subtraction**) Algorithm

- When the sign of A and B are identical (**different**) , add the magnitudes and attach the sign of A to the result.
- When the signs of A and B are different (**identical**), compare the magnitudes and subtract the smaller number from the larger.
 - Choose the sign of result to be same as A if $A > B$
 - or the complement of sign of A if $A < B$
 - if $A = B$ subtract B from A and make the sign of result positive



Operation	Add Magnitudes	Subtract Magnitudes		
		A>B	A<B	A=B
$(+A) + (+B)$	$+(A+B)$			
$(+A) + (-B)$		$+(A-B)$	$-(B-A)$	$+(A-B)$
$(-A) + (+B)$		$-(A-B)$	$+(B-A)$	$+(A-B)$
$(-A) + (-B)$	$-(A+B)$			
$(+A) - (+B)$		$+(A-B)$	$-(B-A)$	$+(A-B)$
$(+A) - (-B)$	$+(A+B)$			
$(-A) - (+B)$	$-(A+B)$			
$(-A) - (-B)$		$-(A-B)$	$+(B-A)$	$+(A-B)$



Example

Adding 6_{10} to 7_{10} in binary

Solution

6	0110
7	0111
<hr/>	
13	1101
<hr style="border-top: 1px dashed black;"/>	




Computer Addition

- Can be taken place in 32 bit formats

←

$$\begin{array}{r} 0000\ 0000\ 0000\ 0000\ 0000\ 0000\ 0000\ 0111_2 = 7_{10} \\ 0000\ 0000\ 0000\ 0000\ 0000\ 0000\ 0000\ 0110_2 = 6_{10} \end{array}$$

$$0000\ 0000\ 0000\ 0000\ 0000\ 0000\ 0000\ 1101_2 = 13_{10}$$

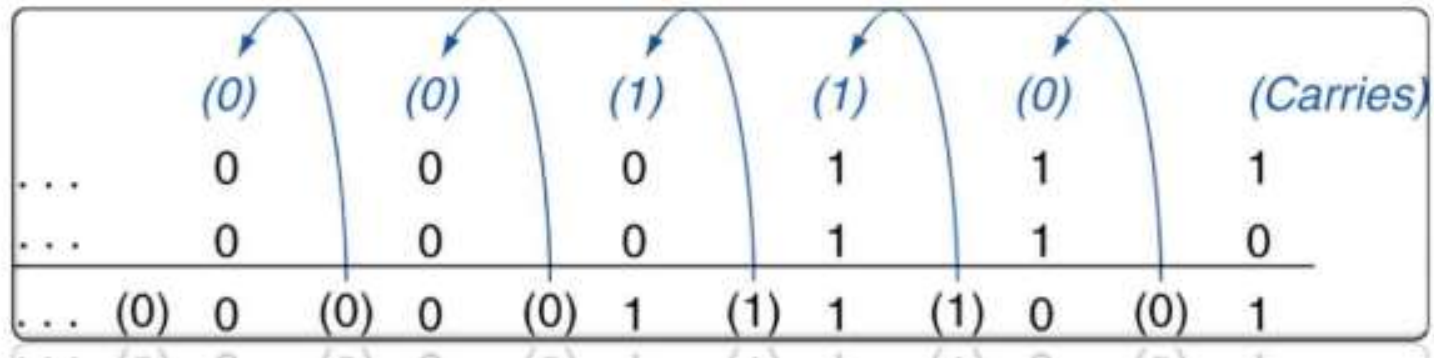



Example

- Consider a two 4 bit positive number
- $+9$ and $+8 = 01001 + 01000 = 10001$
- Consider a two 8 bit positive number
- $+98$ and $+87$

01001 1000

01000 0111

10001 1111



Example

- Consider a two 4 bit Negative number
- -9 and $-6 = 11001 + 10110 = 101111$
 - 1's complement - to avoid overflow
- Consider a two 8 bit positive number
- -83 and -24

```
11000 0011
10010 0100
101010 0111
```



Subtract the following.

$$1. +12 - (+4) = +12 + (-4) = 8$$

$$2. +16 - (-6) = +16 + (+6) = 22$$

$$3. -20 - (+3) = -20 + (-3) = -23$$

$$4. -5 - (-2) = -5 + (+2) = -3$$



Reference link

Cliffsnotes.com

[https://www.cliffsnotes.com/study-guides/algebra/algebra-i/signed-numbers-fractions-and-percents/signed-numbers-positive-numbers-and-negative-numbers#:~:text=When%20adding%20two%20numbers%20with%20different%20signs%20\(one%20positive%20and,with%20the%20larger%20absolute%20value.&text=Add%20the%20following.,-Example%203&text=Add%20the%20following.,-15&text=To%20subtract%20positive%20and%20For,being%20subtracted%20and%20then%20add.](https://www.cliffsnotes.com/study-guides/algebra/algebra-i/signed-numbers-fractions-and-percents/signed-numbers-positive-numbers-and-negative-numbers#:~:text=When%20adding%20two%20numbers%20with%20different%20signs%20(one%20positive%20and,with%20the%20larger%20absolute%20value.&text=Add%20the%20following.,-Example%203&text=Add%20the%20following.,-15&text=To%20subtract%20positive%20and%20For,being%20subtracted%20and%20then%20add.)

