



SNS COLLEGE OF TECHNOLOGY

(An Autonomous Institution)
COIMBATORE – 641035



19MCE304- DESIGN OF EMBEDDED SYSTEMS

Scheduling policies

The process scheduling is the activity of the process manager that handles the removal of the running process from the CPU and the selection of another process on the basis of a particular strategy.

Process scheduling is an essential part of a Multiprogramming operating systems. Such operating systems allow more than one process to be loaded into the executable memory at a time and the loaded process shares the CPU using time multiplexing.

Categories of Scheduling

There are two categories of scheduling:


1. **Non-preemptive:** Here the resource can't be taken from a process until the process completes execution. The switching of resources occurs when the running process terminates and moves to a waiting state.
2. **Preemptive:** Here the OS allocates the resources to a process for a fixed amount of time. During resource allocation, the process switches from running state to ready state or from waiting state to ready state. This switching occurs as the CPU may give priority to other processes and replace the process with higher priority with the running process.

Process Scheduling Queues

The OS maintains all Process Control Blocks (PCBs) in Process Scheduling Queues. The OS maintains a separate queue for each of the process states and PCBs of all processes in the same execution state are placed in the same queue. When the state of a process is changed, its PCB is unlinked from its current queue and moved to its new state queue.

The Operating System maintains the following important process scheduling queues –

- **Job queue** – This queue keeps all the processes in the system.
- **Ready queue** – This queue keeps a set of all processes residing in main memory, ready and waiting to execute. A new process is always put in this queue.
- **Device queues** – The processes which are blocked due to unavailability of an I/O device constitute this queue.

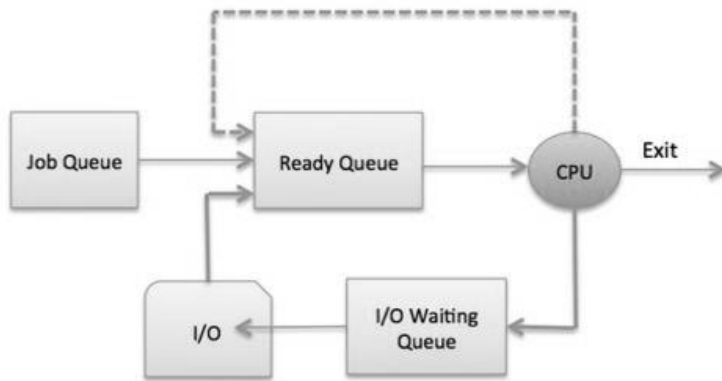

The OS can use different policies to manage each queue (FIFO, Round Robin, Priority, etc.). The OS scheduler determines how to move processes between the ready and run queues which can only have one entry per processor core on the system; in the above diagram, it has been merged with the CPU.

Two-State Process Model

Two-state process model refers to running and non-running states which are described below –

S.N. State & Description

1 Running

When a new process is created, it enters into the system as in the running state.

2 Not Running

Processes that are not running are kept in queue, waiting for their turn to execute. Each entry in the queue is a pointer to a particular process. Queue is implemented by using linked list. Use of dispatcher is as follows. When a process is interrupted, that process is transferred in the waiting queue. If the process has completed or aborted, the process is discarded. In either case, the dispatcher then selects a process from the queue to execute.

Schedulers

Schedulers are special system software which handle process scheduling in various ways. Their main task is to select the jobs to be submitted into the system and to decide which process to run. Schedulers are of three types –

- Long-Term Scheduler
- Short-Term Scheduler
- Medium-Term Scheduler